

## WatchGuard

### Multi-Mode Ground Surveillance Radar

> WatchGuard (ENA-2180) is a family of operationally-proven radars that provide tactical ground surveillance capabilities to security and defense forces. The high-performance radars can be installed at fixed sites, integrated into networked systems to protect borders, bases, airports and other critical infrastructures. Lightweight, portable, and quick to set-up, the radars, cables, power supply and travel case can be configured as a man-packable solution for mobile forces.

Operating in X-Band, the pulse-Doppler radars employ Active Electronically Scanning Array (AESA) technology for optimized performance and reliability. The radar's innovative design incorporates a single solid-state module with no wiring or moving parts, and is controlled by a user-friendly Command and Control unit. With powerful signal processing capabilities, WatchGuard can perform electronic scanning or staring, providing both wide area coverage and targeting of threats at long distances with the ability to simultaneously track-while-scan over 300 targets. The all-weather systems includes an internal GPS used for detailed mapping. Target data (track and speed) is displayed on a map and provides critical assistance to field commanders and remote decision-makers. Optional EO camera integration can enhance target classification.




CUAS




Homeland Security

# WatchGuard 1 & 2 Panels Configurations

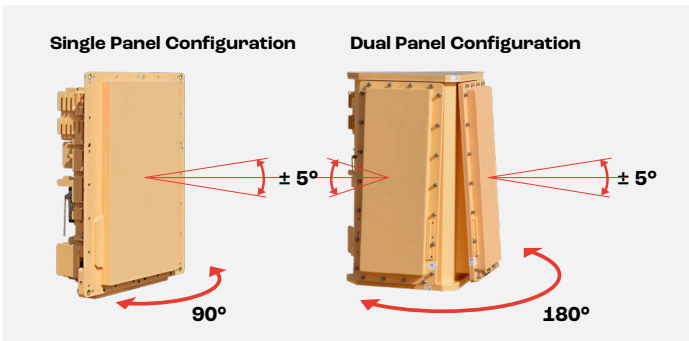

# WatchGuard Extended Elevation (EE) 1 & 2 Panels Configurations

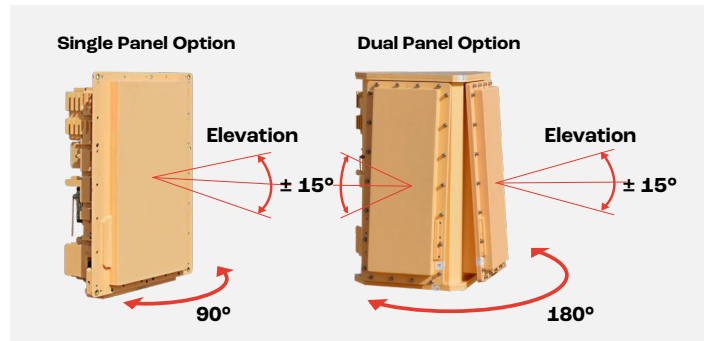


## Features

- Multi-Mode Radar
- Modes: Staring or scanning beam
- Digital Beam Forming (DBF)
- SMR (Single Module Radar) - one board, no wiring
- Internal GPS for detailed mapping on a user-friendly C2 workstation
- Fully digital in receive and transmit
- Portable – includes complete backpack solution (cables, power supply, travel case)
- High reliability – Solid state technology
- Mean-Time-Between-Failures (MTBF): > 20 hours

## Intelligent Modular System

WatchGuard radars are modular, with the ability to connect two panels to extend the azimuth coverage to  $180^\circ$ . In addition, extended elevation configuration provides coverage of up to  $30^\circ$ . Panels can be positioned to provide  $90^\circ$  azimuth or perpendicular to one another providing wider coverage but utilizing the same radar module. The radars can be networked with one another offering an extended radar coverage.

The radar operates in two search modes:

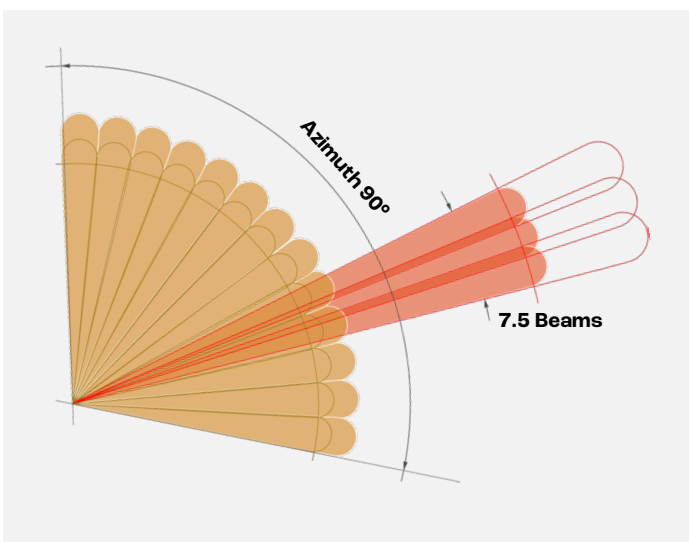

### Staring Mode

Using wide transmitting and multiple receive beams, the radar illuminates a wide sector ( $90^\circ$ ) and updates threats simultaneously from the covered area. Wider beam monitors mountain range and valley or gully/wadi.

### Scanning Mode

Using a narrow beam, the radar illuminates a narrow sector ( $7.5^\circ$ ) improving the signal-to-noise ratio received from the target (low RCS detection, accuracy) and offers longer ranges.

# Standard & Extended Elevation (EE) WatchGuard Specifications

Description	90° Single Panel Configuration	180° Dual Panel Configuration
<b>Detection range – Pedestrian / Vehicle (Revisit time = 1 sec)</b>	5 / 7.5 mi (8 / 12 km)	3.1 / 5 mi (5 / 8 km)
<b>RCS Reference – Pedestrian / Vehicle (0.5 / 5 m<sup>2</sup>)</b>	2.5 / 4.3 mi (4 / 7 km) (EE)	1.6 / 2.8 mi (2.5 / 4.5 km) (EE)
<b>MDV</b>	.4 mi / hr (0.6 km / hr)	.4 mi / hr (0.6 km / hr)
<b>Range Accuracy</b>	3.3 ft (1 m)	3.3 ft (1 m)
<b>Azimuth Accuracy</b>	0.5°	1°
<b>Coverage El</b>	± 5° ± 15° (EE)	± 5° ± 15° (EE)
<b>Coverage Az</b>	90°	180°
<b>Size (H x W x D)</b>	18.5 x 13.6 x 7.5 in (47 x 34.5 x 19 cm)	19.5 x 15 x 13.8 in (49.5 x 38 x 35 cm)
<b>Weight</b>	29.8 lbs (13.5 kg)	46.3 lbs (21 kg)
<b>Power Consumption</b>	120 W	120 W



ELTA North America  
8955 Henkels Lane  
Annapolis Junction, MD 20701  
eltanorthamerica.com

© 2021 ELTA NORTH AMERICA | Updated 09/11/2021

The information contained within this product data sheet is not subject to export controls and may be released without export restrictions. The equipment described herein may require U.S. Government authorization for export purposes. Diversion contrary to U.S. law is prohibited.